


2024/06/03 0331Z

KLAX R0953 ENNEY WORSH NEWPO R0176 KSNA

53.19 nm / 98.50 km

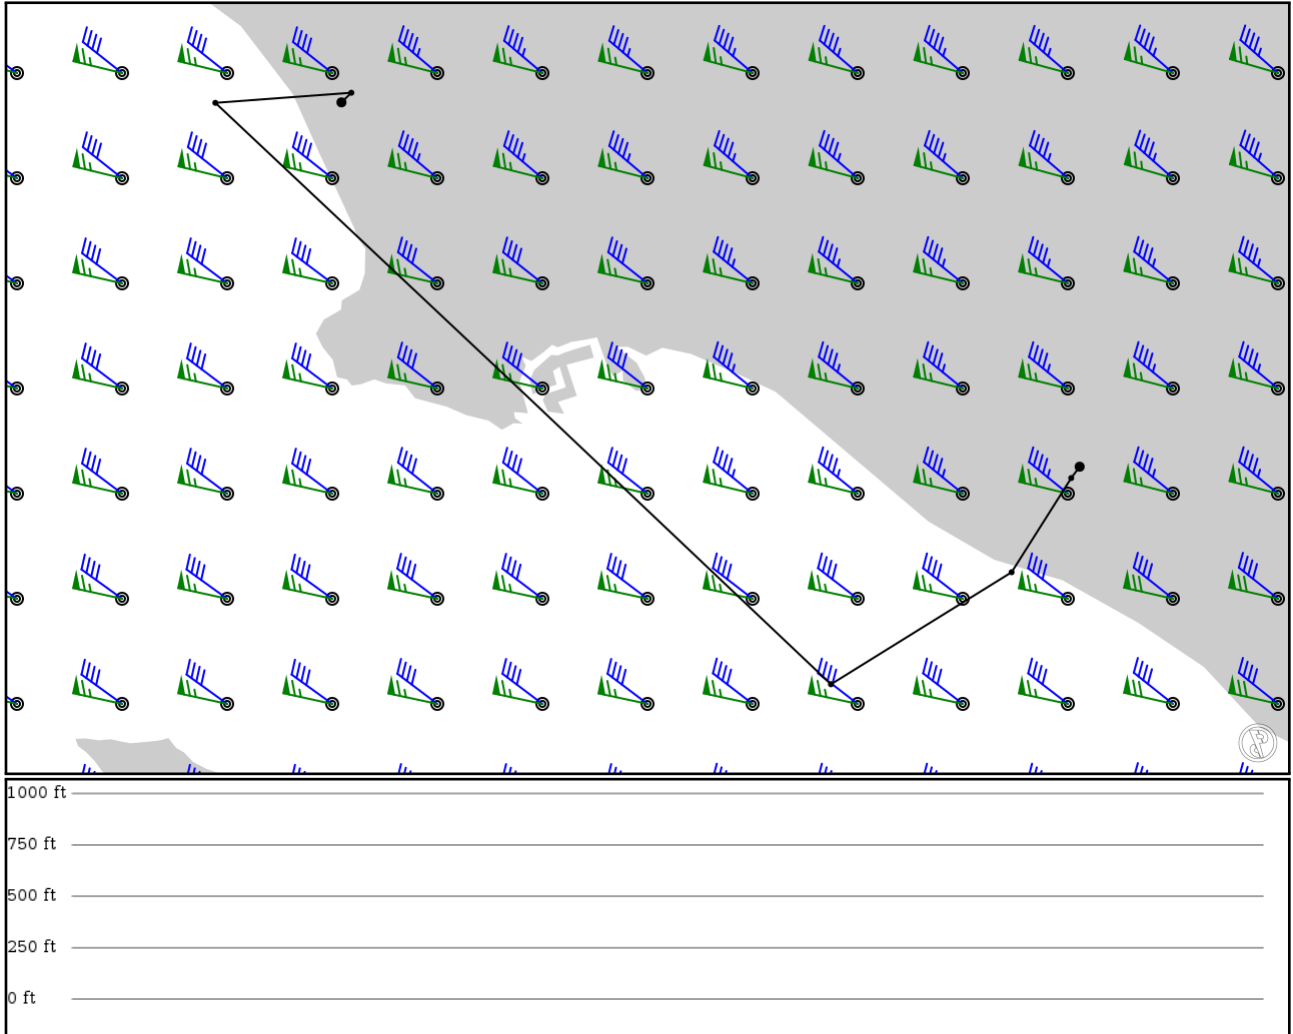

Notes

Requested: KLAX R0953 ENNEY WORSH NEWPO R0176 KSNA

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KLAX	-	33.94313	0 ft	-	Los Angeles Intl
APT	-	-118.40892	0 m		
R0953	-	33.95019	0 ft	0	-
FIX	-	-118.40166	0 m		
ENNEY	-	33.94278	0 ft	4	-
FIX	-	-118.50139	0 m		
WORSH	-	33.51667	0 ft	34	-
FIX	-	-118.05000	0 m		
NEWPO	-	33.59878	0 ft	8	-
FIX	-	-117.91754	0 m		
R0176	-	33.66780	0 ft	4	-
FIX	-	-117.87383	0 m		
KSNA	-	33.67611	0 ft	0	Orange County - John Wayne
APT	-	-117.86764	0 m		

KLAX

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 125 ft / 38 m
Location: 33.943100 -118.409000
Magnetic Var: 11.435 E

METAR

KLAX 030253Z 26009KT 10SM FEW030 SCT250 16/12 A2990 RMK A02 SLP124 T01610122 53002

TAF

TAF AMD KLAX 030256Z 0303/0406 26008KT P6SM SCT030 FM030600 VRB03KT P6SM BKN015 FM031000 12006KT P6SM OVC015 FM031800 12006KT P6SM BKN015

Frequencies

COM - 122.95 MHz - UNICOM	GND - 121.65 MHz - LOS ANGELES GROUND
GND - 121.75 MHz - LOS ANGELES GROUND	GND - 121.40 MHz - LOS ANGELES GROUND
TWR - 119.80 MHz - LOS ANGELES TOWER	TWR - 120.95 MHz - LOS ANGELES TOWER
TWR - 133.90 MHz - LOS ANGELES TOWER	REC - 133.80 MHz - D-ATIS
REC - 135.65 MHz - D-ATIS	APP - 124.90 MHz - SOCAL APPROACH
APP - 124.30 MHz - SOCAL APPROACH	APP - 124.50 MHz - SOCAL APPROACH
APP - 128.50 MHz - SOCAL APPROACH	DEP - 125.20 MHz - SOCAL DEPARTURE
DEP - 124.30 MHz - SOCAL DEPARTURE	CLD - 120.35 MHz - CLEARANCE DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	11,106 ft	82.96	CONCRETE	0 ft	381 ft
	61 m	3,385 m	71.52		0 m	116 m
25L	200 ft	11,106 ft	262.98	CONCRETE	0 ft	381 ft
	61 m	3,385 m	251.54		0 m	116 m
07L	151 ft	12,935 ft	82.95	CONCRETE	846 ft	374 ft
	46 m	3,943 m	71.52		258 m	114 m
25R	151 ft	12,935 ft	262.98	CONCRETE	968 ft	197 ft
	46 m	3,943 m	251.54		295 m	60 m
06R	151 ft	10,896 ft	82.95	CONCRETE	551 ft	384 ft
	46 m	3,321 m	71.51		168 m	117 m
24L	151 ft	10,896 ft	262.97	CONCRETE	814 ft	384 ft
	46 m	3,321 m	251.53		248 m	117 m
06L	151 ft	8,936 ft	82.95	CONCRETE	0 ft	0 ft
	46 m	2,724 m	71.51		0 m	0 m
24R	151 ft	8,936 ft	262.96	CONCRETE	0 ft	285 ft
	46 m	2,724 m	251.53		0 m	87 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	DME	IUWU	108.50 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
06R	DME	IGPE	111.70 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
07L	DME	IIAS	111.10 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
07R	DME	IMKZ	109.90 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
24L	DME	IHQB	111.70 MHz	18 nm	-	-	133 ft
				33 km	-		133 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24R	DME	IOSS	108.50 MHz	18 nm 33 km	- -	-	133 ft 133 m
25L	DME	ILAX	109.90 MHz	18 nm 33 km	- -	-	126 ft 126 m
25R	DME	ICFN	111.10 MHz	18 nm 33 km	- -	-	126 ft 126 m
06L	LOC-ILS	IUWU	108.50 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
06R	LOC-ILS	IGPE	111.70 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
07L	LOC-ILS	IIAS	111.10 MHz	18 nm 33 km	82.98 71.54	-	125 ft 125 m
07R	LOC-ILS	IMKZ	109.90 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
24L	LOC-ILS	IHQB	111.70 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
24R	LOC-ILS	IOSS	108.50 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25L	LOC-ILS	ILAX	109.90 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25R	LOC-ILS	ICFN	111.10 MHz	18 nm 33 km	262.98 251.54	-	125 ft 125 m
06L	GS	IUWU	108.50 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
06R	GS	IGPE	111.70 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
07L	GS	IIAS	111.10 MHz	10 nm 19 km	82.98 71.54	3.00	125 ft 125 m
07R	GS	IMKZ	109.90 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
24L	GS	IHQB	111.70 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
24R	GS	IOSS	108.50 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25L	GS	ILAX	109.90 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25R	GS	ICFN	111.10 MHz	10 nm 19 km	262.98 251.54	3.00	125 ft 125 m

KSNA

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 2

Elevation: 56 ft / 17 m
Location: 33.676100 -117.868000
Magnetic Var: 11.276 E

METAR

KSNA 030253Z 22007KT 10SM FEW017 BKN027 BKN036 18/12 A2990 RMK A02 SLP125 T01780122 53006

TAF

TAF KSNA 022330Z 0300/0324 20010KT P6SM SCT017 BKN030 FM030300 VRB04KT P6SM SCT015 BKN025 FM030600 VRB04KT P6SM O

Frequencies

REC - 126.00 MHz - ATIS	COM - 126.80 MHz - CTAF
COM - 122.95 MHz - UNICOM	CLD - 118.00 MHz - CLEARANCE DELIVERY
CLD - 121.85 MHz - CLEARANCE DELIVERY	GND - 120.80 MHz - JOHN WAYNE GROUND
GND - 132.25 MHz - JOHN WAYNE GROUND	TWR - 119.90 MHz - JOHN WAYNE TOWER
TWR - 126.80 MHz - JOHN WAYNE TOWER	TWR - 128.35 MHz - JOHN WAYNE TOWER
APP - 121.30 MHz - SOCAL APPROACH	DEP - 128.10 MHz - SOCAL DEPARTURE
DEP - 132.70 MHz - SOCAL DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
02L	151 ft	5,711 ft	27.79	ASPHALT	0 ft	1,001 ft
	46 m	1,741 m	16.52		0 m	305 m
20R	151 ft	5,711 ft	207.80	ASPHALT	0 ft	194 ft
	46 m	1,741 m	196.52		0 m	59 m
02R	75 ft	2,891 ft	27.81	ASPHALT	0 ft	404 ft
	23 m	881 m	16.53		0 m	123 m
20L	75 ft	2,891 ft	207.81	ASPHALT	0 ft	151 ft
	23 m	881 m	196.53		0 m	46 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
20R	DME	IOJW	108.30 MHz	18 nm	-	-	40 ft
				33 km	-		40 m
20R	DME	ISNA	111.75 MHz	18 nm	-	-	68 ft
				33 km	-		68 m
20R	LOC-ILS	ISNA	111.75 MHz	18 nm	207.81	-	56 ft
				33 km	196.53		56 m
20R	GS	ISNA	111.75 MHz	10 nm	207.81	3.00	56 ft
				19 km	196.53		56 m