


2024/05/20 0304Z

OOMS EMATA OMDB

187.48 nm / 347.21 km

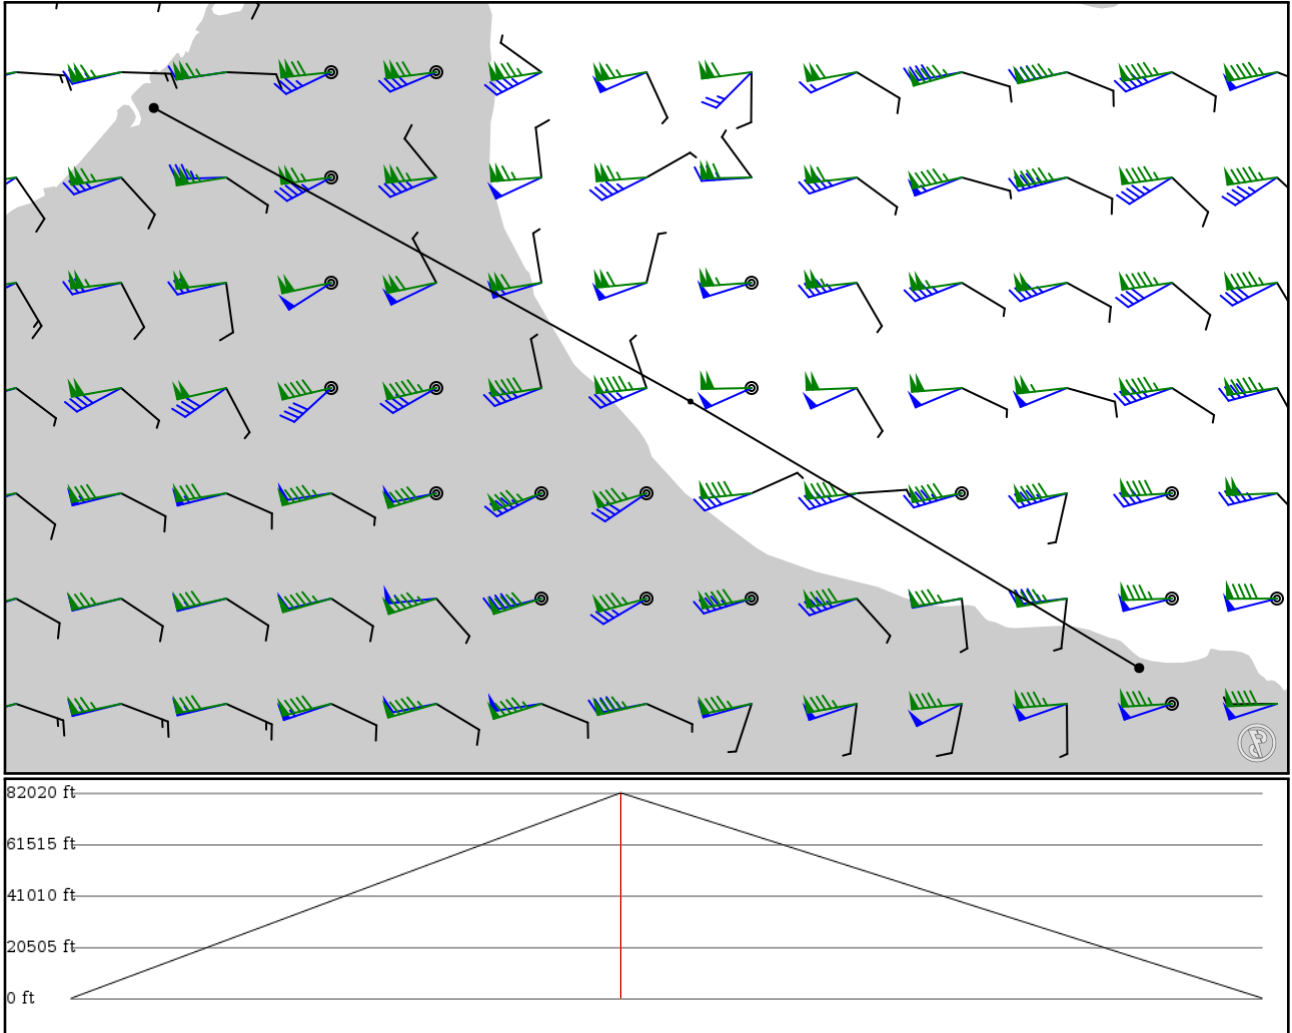

Notes

Basic altitude profile:

- Ascent Rate: 1800ft/min
- Ascent Speed: 144kts
- Cruise Altitude: 25000ft
- Cruise Speed: 320kts
- Descent Rate: 1500ft/min
- Descent Speed: 139kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
OOMS	-	23.60030	0 ft	-	Muscat Intl
APT	-	58.28090	0 m		
EMATA	-	24.38580	25,000 ft	86	-
FIX	-	56.95590	7,620 m		
OMDB	-	25.25110	0 ft	100	Dubai Intl
APT	-	55.37110	0 m		

OOMS

Region: OMAN
Timezone: ASIA/MUSCAT
Runways: 2

Elevation: 46 ft / 14 m
Location: 23.600300 58.280900
Magnetic Var: 1.787 E

METAR

OOMS 200150Z 00000KT CAVOK 32/16 Q1003 NOSIG

TAF

TAF TAF OOMS 192300Z 2000/2106 30006KT 8000 NSC BECMG 2006/2008 06012KT BECMG 2020/2022 VRB02KT

Frequencies

REC - 126.80 MHz - ATIS
TWR - 118.40 MHz -
APP - 119.80 MHz - RADAR
GND - 121.80 MHz -
APP - 121.20 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	197 ft	13,106 ft	84.99	ASPHALT	0 ft	390 ft
	60 m	3,995 m	83.21		0 m	119 m
26R	197 ft	13,106 ft	265.01	ASPHALT	525 ft	394 ft
	60 m	3,995 m	263.22		160 m	120 m
08R	148 ft	11,743 ft	84.98	CONCRETE	1,371 ft	197 ft
	45 m	3,579 m	83.19		418 m	60 m
26L	148 ft	11,743 ft	264.99	CONCRETE	0 ft	200 ft
	45 m	3,579 m	263.21		0 m	61 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08R	DME	IMW	108.30 MHz	18 nm	-	-	45 ft
				33 km	-		45 m
26L	DME	ISB	110.30 MHz	18 nm	-	-	25 ft
				33 km	-		25 m
08L	LOC-ILS	IML	108.90 MHz	18 nm	84.97	-	47 ft
				33 km	83.18		47 m
26R	LOC-ILS	IMR	110.70 MHz	18 nm	264.97	-	48 ft
				33 km	263.18		48 m
08L	GS	IML	108.90 MHz	10 nm	84.97	3.00	47 ft
				19 km	83.18		47 m
26R	GS	IMR	110.70 MHz	10 nm	264.97	3.00	48 ft
				19 km	263.18		48 m

OMDB

Region: UNITED ARAB EMIRATES
Timezone: ASIA/DUBAI
Runways: 2

Elevation: 62 ft / 19 m
Location: 25.251100 55.371100
Magnetic Var: 2.354 E

METAR

OMDB 200200Z 20007KT 170V230 CAVOK 26/21 Q1004 NOSIG

TAF

TAF TAF OMDB 192300Z 2000/2106 18007KT 8000 NSC BECMG 2006/2008 27012KT BECMG 2016/2018 19005KT PROB30 TEMPO 2022

Frequencies

REC - 126.27 MHz - ATIS ARRIVAL	REC - 131.70 MHz - ATIS DEPARTURE
TWR - 126.77 MHz - DUBAI TOWER	TWR - 119.55 MHz - DUBAI TOWER
TWR - 118.75 MHz - DUBAI TOWER	TWR - 119.05 MHz - DUBAI TOWER
GND - 118.35 MHz - DUBAI GROUND	GND - 118.85 MHz - DUBAI GROUND
GND - 121.65 MHz - DUBAI GROUND	CLD - 120.35 MHz - CLEARANCE DELIVERY
APP - 122.50 MHz - MINHAD APPROACH	APP - 126.02 MHz - MINHAD APPROACH
APP - 120.25 MHz - DUBAI ARRIVAL	APP - 124.45 MHz - DUBAI ARRIVAL
APP - 124.90 MHz - DUBAI ARRIVAL	DEP - 126.02 MHz - DUBAI DEPARTURE
DEP - 121.02 MHz - DUBAI DEPARTURE	DEP - 126.20 MHz - DUBAI DEPARTURE
DEP - 120.25 MHz - DUBAI DEPARTURE	APP - 120.40 MHz - DUBAI RADAR
APP - 126.02 MHz - DUBAI RADAR	APP - 127.90 MHz - DUBAI DIRECT

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12R	200 ft	14,604 ft	121.53	ASPHALT	2,352 ft	771 ft
	61 m	4,452 m	119.17		717 m	235 m
30L	200 ft	14,604 ft	301.54	ASPHALT	436 ft	0 ft
	61 m	4,452 m	299.19		133 m	0 m
12L	200 ft	14,289 ft	121.48	ASPHALT	1,496 ft	381 ft
	61 m	4,355 m	119.13		456 m	116 m
30R	200 ft	14,289 ft	301.50	ASPHALT	991 ft	377 ft
	61 m	4,355 m	299.15		302 m	115 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12L	DME	IDBL	110.10 MHz	18 nm	-	-	62 ft
				33 km	-		62 m
30L	DME	IDBW	111.30 MHz	18 nm	-	-	41 ft
				33 km	-		41 m
30R	DME	IDBR	110.90 MHz	18 nm	-	-	44 ft
				33 km	-		44 m
12L	LOC-ILS	IDBL	110.10 MHz	18 nm	121.49	-	62 ft
				33 km	119.14		62 m
12R	LOC-ILS	IDBE	109.50 MHz	18 nm	121.54	-	62 ft
				33 km	119.19		62 m
30L	LOC-ILS	IDBW	111.30 MHz	18 nm	301.54	-	62 ft
				33 km	299.19		62 m
30R	LOC-ILS	IDBR	110.90 MHz	18 nm	301.49	-	62 ft
				33 km	299.14		62 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12L	GS	IDBL	110.10 MHz	10 nm	121.49	3.00	62 ft
				19 km	119.14		62 m
12R	GS	IDBE	109.50 MHz	10 nm	121.54	3.00	62 ft
				19 km	119.19		62 m
30L	GS	IDBW	111.30 MHz	10 nm	301.54	3.00	62 ft
				19 km	299.19		62 m
30R	GS	IDBR	110.90 MHz	10 nm	301.49	3.00	62 ft
				19 km	299.14		62 m